


Package Information

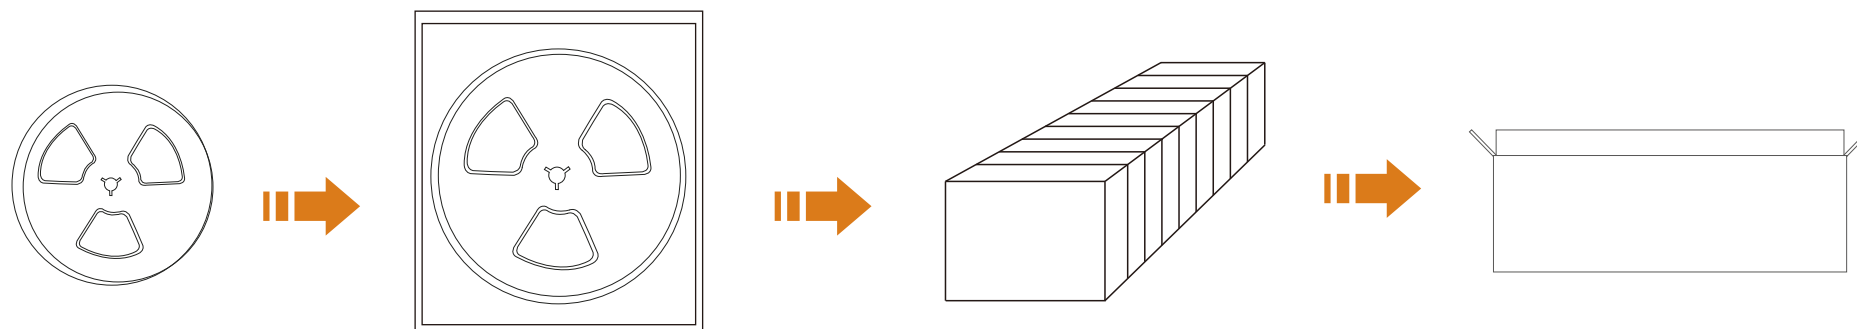

Model	ESD bag dimension	Inner box dimension	Master carton dimension	GW	QTY/CTN
CL-5050RGB+XW036HY12-W12	240*215mm	495*248*225mm	510*515*480mm	11KG	100 Reels
CL-5050RGB+XW060HY12-W12	240*215mm	495*248*225mm	510*515*480mm	11KG	100 Reels
CL-5050RGBXW060HY12-W12	240*215mm	495*248*225mm	510*515*480mm	10KG	100 Reels
CL-5050RGBXW060HY24-W12	240*215mm	495*248*225mm	510*515*480mm	10KG	100 Reels
CL-5050RGBXW084HY24-W12	240*215mm	495*248*225mm	510*515*480mm	10KG	100 Reels
CL-5050RGB+WW060HY12-W12	240*215mm	495*248*225mm	510*515*480mm	11KG	100 Reels
CL-5050RGB+3014WW060HY24-W12	240*215mm	495*248*225mm	510*515*480mm	12KG	100 Reels
CL-5050RGBWW030HY12-W12	240*215mm	495*248*225mm	510*515*480mm	10KG	100 Reels
CL-5050RGBWW060HY24-W12	240*215mm	495*248*225mm	510*515*480mm	11KG	100 Reels

*The above packing info are base on single IP20 strips in an ESD bag. Customized package welcomed.