

DC12V adapter/Adapter specification

| LED strip model | Power supply Model & Spec. Length of strip | CL-12V12W-W | CL-12V15W-W | CL-12V18W-W | CL-12V24W-W | CL-12V36W-W |
|--------------------------|---|--|---|--|--|--|
| | | Name:Wall plug power supply Power:12W Input voltage:100-240V Output voltage:12V Output current:1A Protection grade:: IP20 | Name:Wall plug power supply Power:15W Input voltage:100-240V Output voltage:12V Output current:1.25A Protection grade:: IP20 | Name:Wall plug power supply Power:18W Input voltage:100-240V Output voltage:12V Output current:1.5A Protection grade:: IP20 | Name:Wall plug power supply Power:24W Input voltage:100-240V Output voltage:12V Output current:2A Protection grade:: IP20 | Name:Wall plug power supply Power:36W Input voltage:100-240V Output voltage:12V Output current:3A Protection grade:: IP20 |
| CL-5050RGB+XW036HY12-W12 | 1m | 2m | 2m | 3m | 4m | |
| CL-5050RGB+XW060HY12-W12 | 1m | 1m | 1m | 2m | 2m | |
| CL-5050RGBXW060HY12-W12 | 1m | 1m | 1m | 1m | 2m | |
| CL-5050RGB+WW060HY12-W12 | 1m | 1m | 1m | 1m | 2m | |
| CL-5050RGBWW030HY12-W12 | 1m | 1m | 1m | 1m | 2m | |

*5050 LED strip working voltage: 12V
*2 year warranty

DC12V adapter/Adapter specification

| LED strip model | Power supply Model & Spec. | CL-12V48W-D | CL-12V60W-D | CL-12V72W-D | CL-12V84W-D | CL-12V96W-D |
|--------------------------|----------------------------|---|---|---|---|---|
| | Length of strip | Name: Desktop power supply Power:48W Input voltage:100-240V Output voltage:12V Output current:4A Protection grade: IP20 | Name: Desktop power supply Power:60W Input voltage:100-240V Output voltage:12V Output current:5A Protection grade: IP20 | Name: Desktop power supply Power:72W Input voltage:100-240V Output voltage:12V Output current:6A Protection grade: IP20 | Name: Desktop power supply Power:84W Input voltage:100-240V Output voltage:12V Output current:7A Protection grade: IP20 | Name: Desktop power supply Power:96W Input voltage:100-240V Output voltage:12V Output current:8A Protection grade: IP20 |
| CL-5050RGB+XW036HY12-W12 | 5m | 6m | 7m | 8m | 10m | |
| CL-5050RGB+XW060HY12-W12 | 3m | 4m | 4m | 5m | 6m | |
| CL-5050RGBXW060HY12-W12 | 2m | 3m | 3m | 4m | 4m | |
| CL-5050RGB+WW060HY12-W12 | 2m | 2m | 3m | 3m | 4m | |
| CL-5050RGBWW030HY12-W12 | 2m | 2m | 3m | 3m | 4m | |

*5050 LED strip working voltage: 12V

DC12V adapter/Adapter specification

| LED strip model | Power supply Model & Spec. | CL-12V6W-D | CL-12V24W-D | CL-12V36W-D | CL-12V45W-D |
|--------------------------|----------------------------|---|--|--|---|
| | Length of strip | Name:Constant voltage plastic housing power supply Power:6W Input voltage:100-240V Output voltage:12V Output current:0.5A Protection grade: IP20 | Name:Constant voltage plastic housing power supply Power:24W Input voltage:100-240V Output voltage:12V Output current:2A Protection grade: IP20 | Name:Constant voltage plastic housing power supply Power:36W Input voltage:100-240V Output voltage:12V Output current:3A Protection grade: IP20 | Name:Constant voltage plastic housing power supply Power:45W Input voltage:100-240V Output voltage:12V Output current:3.75A Protection grade: IP20 |
| CL-5050RGB+XW036HY12-W12 | | 1m | 3m | 4m | 5m |
| CL-5050RGB+XW060HY12-W12 | | 1m | 2m | 2m | 3m |
| CL-5050RGBXW060HY12-W12 | | 1m | 1m | 1m | 2m |
| CL-5050RGB+WW060HY12-W12 | | 1m | 1m | 2m | 2m |
| CL-5050RGBWW030HY12-W12 | | 1m | 1m | 2m | 2m |

*5050 LED strip working voltage: 12V
*2 year warranty

3.36m

2.4m

RGB/RGB+W/RGB+WW LED strip

CL LIGHTING

DC12V adapter/Adapter specification

| LED strip model | Power supply Model & Spec. | CL-12V30W-IP67 | CL-12V40W-IP67 | CL-12V50W-IP67 | CL-12V60W-IP67 | CL-12V80W-IP67 |
|--------------------------|----------------------------|--|--|--|--|--|
| | Length of strip | Name:Waterproof power supply Power:30W Input voltage:197-265V Output voltage:12V Output current:2.5A Protection grade: : IP67 Size:222*30*20mm | Name:Waterproof power supply Power:40W Input voltage:197-265V Output voltage:12V Output current:3.3A Protection grade: : IP67 Size:222*30*20mm | Name:Waterproof power supply Power:50W Input voltage:197-265V Output voltage:12V Output current:4.1A Protection grade: : IP67 Size:222*30*20mm | Name:Waterproof power supply Power:60W Input voltage:197-265V Output voltage:12V Output current:5A Protection grade: : IP67 Size:178*69*43mm | Name:Waterproof power supply Power:80W Input voltage:197-265V Output voltage:12V Output current:6.6A Protection grade: : IP67 Size:178*69*43mm |
| CL-5050RGB+XW036HY12-W12 | 3m | 4m | 5m | 6m | 8m | |
| CL-5050RGB+XW060HY12-W12 | 2m | 3m | 3m | 4m | 5m | |
| CL-5050RGBXW060HY12-W12 | 2m | 2m | 2m | 3m | 4m | |
| CL-5050RGB+WW060HY12-W12 | 1m | 2m | 2m | 2m | 3m | |
| CL-5050RGBWW030HY12-W12 | 1m | 2m | 2m | 2m | 3m | |

*5050 LED strip working voltage: 12V

*2 year warranty

DC12V adapter/Adapter specification

| LED strip model | Power supply Model & Spec. | CL-12V100W-IP67 | CL-12V120W-IP67 | CL-12V150W-IP67 | CL-12V200W-IP67 | CL-12V250W-IP67 |
|--------------------------|----------------------------|---|--|--|--|---|
| | Length of strip | Name:Waterproof power supply Power:100W Input voltage:197-265V Output voltage:12V Output current:8.3A Protection grade: IP67 Size:210*69*43mm | Name:Waterproof power supply Power:120W Input voltage:197-265V Output voltage:12V Output current:10A Protection grade: IP67 Size:240*69*43mm | Name:Waterproof power supply Power:150W Input voltage:197-265V Output voltage:12V Output current:12.5A Protection grade: IP67 Size:240*69*43mm | Name:Waterproof power supply Power:200W Input voltage:197-265V Output voltage:12V Output current:1.6A Protection grade: IP67 Size:235*126*59mm | Name:Waterproof power supply Power:250W Input voltage:197-265V Output voltage:12V Output current:16.6A Protection grade: IP67 Size:235*126*59mm |
| CL-5050RGB+XW036HY12-W12 | 10m | 12m | 15m | 19m | 24m | |
| CL-5050RGB+XW060HY12-W12 | 6m | 7m | 9m | 12m | 15m | |
| CL-5050RGBXW060HY12-W12 | 4m | 5m | 7m | 9m | 11m | |
| CL-5050RGB+WW060HY12-W12 | 4m | 4m | 5m | 7m | 9m | |
| CL-5050RGBWW030HY12-W12 | 4m | 4m | 5m | 7m | 9m | |

*5050 LED strip working voltage: 12V

*2 year warranty

DC12V adapter/Adapter specification

| LED strip model | Power supply Model & Spec. | CL-12V24W-S | CL-12V40W-S | CL-12V48W-S | CL-12V60W-S | CL-12V75W-S |
|--------------------------|----------------------------|---|---|---|---|---|
| | Length of strip | Name:Standard switch power supply Power:24W Input voltage:100-240V Output voltage:12V Output current:2A Protection grade: IP20 | Name:Standard switch power supply Power:40W Input voltage:100-240V Output voltage:12V Output current:3.2A Protection grade: IP20 | Name:Standard switch power supply Power:48W Input voltage:100-240V Output voltage:12V Output current:4A Protection grade: IP20 | Name:Standard switch power supply Power:60W Input voltage:100-240V Output voltage:12V Output current:5A Protection grade: IP20 | Name:Standard switch power supply Power:75W Input voltage:100-240V Output voltage:12V Output current:6.3A Protection grade: IP20 |
| CL-5050RGB+XW036HY12-W12 | 3m | 4m | 5m | 6m | 7m | |
| CL-5050RGB+XW060HY12-W12 | 2m | 3m | 3m | 4m | 5m | |
| CL-5050RGBXW060HY12-W12 | 1m | 2m | 2m | 3m | 3m | |
| CL-5050RGB+WW060HY12-W12 | 1m | 2m | 2m | 2m | 3m | |
| CL-5050RGBWW030HY12-W12 | 1m | 2m | 2m | 2m | 3m | |

*5050 LED strip working voltage: 12V
*1 year warranty

DC12V adapter/Adapter specification

| LED strip model | Power supply Model & Spec. | CL-12V100W-S | CL-12V120W-S | CL-12V150W-S | CL-12V180W-S | CL-12V200W-S |
|--------------------------|----------------------------|--|---|---|---|---|
| | Length of strip | Name:Standard switch power supply Power:100W Input voltage:100-240V Output voltage:12V Output current:8.5A Protection grade: : IP20 | Name:Standard switch power supply Power:120W Input voltage:100-240V Output voltage:12V Output current:10A Protection grade: : IP20 | Name:Standard switch power supply Power:150W Input voltage:100-240V Output voltage:12V Output current:12.5A Protection grade: : IP20 | Name:Standard switch power supply Power:180W Input voltage:100-240V Output voltage:12V Output current:15A Protection grade: : IP20 | Name:Standard switch power supply Power:200W Input voltage:100-240V Output voltage:12V Output current:16.6A Protection grade: : IP20 |
| CL-5050RGB+XW036HY12-W12 | 10m | 12m | 15m | 17m | 19m | |
| CL-5050RGB+XW060HY12-W12 | 6m | 7m | 9m | 11m | 12m | |
| CL-5050RGBXW060HY12-W12 | 4m | 5m | 7m | 8m | 9m | |
| CL-5050RGB+WW060HY12-W12 | 4m | 4m | 5m | 6m | 7m | |
| CL-5050RGBWW030HY12-W12 | 4m | 4m | 5m | 6m | 7m | |

*5050 LED strip working voltage: 12V
*1 year warranty

DC12V adapter/Adapter specification

| LED strip model | Power supply Model & Spec. | CL-12V250W-S | CL-12V300W-S | CL-12V360W-S | CL-12V400W-S | CL-12V420W-S |
|--------------------------|----------------------------|---|---|---|---|---|
| | Length of strip | Name:Standard switch power supply Power:250W Input voltage:100-240V Output voltage:12V Output current:20.8A Protection grade: IP20 | Name:Standard switch power supply Power:300W Input voltage:100-240V Output voltage:12V Output current:25A Protection grade: IP20 | Name:Standard switch power supply Power:360W Input voltage:100-240V Output voltage:12V Output current:30A Protection grade: IP20 | Name:Standard switch power supply Power:400W Input voltage:100-240V Output voltage:12V Output current:33.3A Protection grade: IP20 | Name:Standard switch power supply Power:420W Input voltage:100-240V Output voltage:12V Output current:35A Protection grade: IP20 |
| CL-5050RGB+XW036HY12-W12 | 24m | 29m | 35m | 38m | 40m | |
| CL-5050RGB+XW060HY12-W12 | 15m | 17m | 20m | 23m | 24m | |
| CL-5050RGBXW060HY12-W12 | 11m | 13m | 15m | 17m | 18m | |
| CL-5050RGB+WW060HY12-W12 | 9m | 10m | 12m | 14m | 14m | |
| CL-5050RGBWW030HY12-W12 | 9m | 10m | 12m | 14m | 14m | |

*5050 LED strip working voltage: 12V

*1 year warranty

DC24V adapter/Adapter specification

| LED strip model | Power supply Model & Spec. | CL-24V48W-D | CL-24V60W-D | CL-24V72W-D | CL-24V84W-D | CL-24V96W-D |
|----------------------------------|----------------------------|--|--|--|--|--|
| | Length of strip | Name:Desktop power supply Power:48W Input voltage:100-240V Output voltage:24V Output current:2A Protection grade:: IP20 | Name:Desktop power supply Power:60W Input voltage:100-240V Output voltage:24V Output current:2.5A Protection grade:: IP20 | Name:Desktop power supply Power:72W Input voltage:100-240V Output voltage:24V Output current:3A Protection grade:: IP20 | Name:Desktop power supply Power:84W Input voltage:100-240V Output voltage:24V Output current:3.5A Protection grade:: IP20 | Name:Desktop power supply Power:96W Input voltage:100-240V Output voltage:24V Output current:4A Protection grade:: IP20 |
| CL-5050RGBXW060HY24-W12 | 2m | 3m | 3m | 4m | 4m | |
| CL-5050RGBXW084HY24-W12 | 2m | 2m | 2m | 3m | 3m | |
| CL-5050RGB+3014WW060HY24-W12 | 3m | 4m | 5m | 5m | 6m | |
| CL-5050RGB+2835CW+WW036HL24V-W12 | 5m | 7m | 8m | 10m | 11m | |
| CL-5050RGBWW060HY24-W12 | 6m | 7m | 9m | 10m | 11m | |
| CL-5050RGBWW084HL24V-W12 | 2m | 3m | 3m | 4m | 4m | |

*5050 LED strip working voltage: 24V

DC24V adapter/Adapter specification

| LED strip model | Power supply Model & Spec. | CL-24V6W-D | CL-24V24W-D | CL-24V36W-D | CL-24V45W-D |
|----------------------------------|----------------------------|---|--|--|---|
| | Length of strip | Name:Constant voltage plastic housing power supply Power:6W Input voltage:100-240V Output voltage:24V Output current:0.5A Protection grade:: IP20 | Name:Constant voltage plastic housing power supply Power:24W Input voltage:100-240V Output voltage:24V Output current:2A Protection grade:: IP20 | Name:Constant voltage plastic housing power supply Power:36W Input voltage:100-240V Output voltage:24V Output current:3A Protection grade:: IP20 | Name:Constant voltage plastic housing power supply Power:45W Input voltage:100-240V Output voltage:24V Output current:3.75A Protection grade:: IP20 |
| CL-5050RGBXW060HY24-W12 | 1m | 1m | 2m | 2m | |
| CL-5050RGBXW084HY24-W12 | 1m | 1m | 1m | 2m | |
| CL-5050RGB+3014WW060HY24-W12 | 1m | 2m | 2m | 3m | |
| CL-5050RGB+2835CW+WW036HL24V-W12 | 1m | 3m | 4m | 5m | |
| CL-5050RGBWW060HY24-W12 | 1m | 3m | 4m | 5m | |
| CL-5050RGBWW084HL24V-W12 | 1m | 4m | 2m | 2m | |

*5050 LED strip working voltage: 24V
*2 year warranty

DC24V adapter/Adapter specification

| LED strip model | Power supply Model & Spec. | CL-24V30W-IP67 | CL-24V40W-IP67 | CL-24V50W-IP67 | CL-24V60W-IP67 | CL-24V80W-IP67 |
|----------------------------------|----------------------------|---|--|---|--|--|
| | Length of strip | Name:Waterproof power supply Power:30W Input voltage:197-265V Output voltage:24V Output current:1.25A Protection grade: IP67 Size:222*30*20mm | Name:Waterproof power supply Power:40W Input voltage:197-265V Output voltage:24V Output current:1.6A Protection grade: IP67 Size:222*30*20mm | Name:Waterproof power supply Power:50W Input voltage:197-265V Output voltage:24V Output current:2.08A Protection grade: IP67 Size:222*30*20mm | Name:Waterproof power supply Power:60W Input voltage:197-265V Output voltage:24V Output current:2.5A Protection grade: IP67 Size:178*69*43mm | Name:Waterproof power supply Power:80W Input voltage:197-265V Output voltage:24V Output current:3.3A Protection grade: IP67 Size:178*69*43mm |
| CL-5050RGBXW060HY24-W12 | 2m | 2m | 2m | 4m | 4m | |
| CL-5050RGBXW084HY24-W12 | 1m | 2m | 2m | 2m | 3m | |
| CL-5050RGB+3014WW060HY24-W12 | 2m | 3m | 3m | 4m | 5m | |
| CL-5050RGB+2835CW+WW036HL24V-W12 | 3m | 5m | 6m | 7m | 9m | |
| CL-5050RGBWW060HY24-W12 | 4m | 5m | 6m | 7m | 9m | |
| CL-5050RGBWW084HL24V-W12 | 1m | 2m | 2m | 3m | 4m | |

*5050 LED strip working voltage: 24V
*2 year warranty

3.36m

2.4m

RGB/RGB+W/RGB+WW LED strip

CL LIGHTING

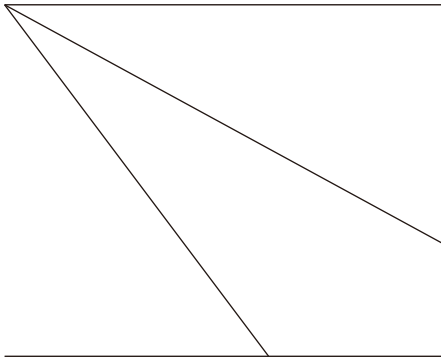
DC24V adapter/Adapter specification

| LED strip model | Power supply Model & Spec. Length of strip | CL-24V100W-IP67 | CL-24V120W-IP67 | CL-24V150W-IP67 | CL-24V200W-IP67 | CL-24V250W-IP67 |
|----------------------------------|---|---|---|--|---|--|
| | | Name:Waterproof power supply Power:100W Input voltage:197-265V Output voltage:24V Output current:4.1A Protection grade: IP67 Size:210*69*43mm | Name:Waterproof power supply Power:120W Input voltage:197-265V Output voltage:24V Output current:5A Protection grade: IP67 Size:240*69*43mm | Name:Waterproof power supply Power:150W Input voltage:197-265V Output voltage:24V Output current:6.25A Protection grade: IP67 Size:240*69*43mm | Name:Waterproof power supply Power:200W Input voltage:197-265V Output voltage:24V Output current:0.84A Protection grade: IP67 Size:235*126*59mm | Name:Waterproof power supply Power:250W Input voltage:197-265V Output voltage:24V Output current:8.3A Protection grade: IP67 Size:235*126*59mm |
| CL-5050RGBXW060HY24-W12 | 4m | 5m | 7m | 9m | 11m | |
| CL-5050RGBXW084HY24-W12 | 3m | 4m | 5m | 6m | 8m | |
| CL-5050RGB+3014WW060HY24-W12 | 6m | 8m | 9m | 12m | 15m | |
| CL-5050RGB+2835CW+WW036HL24V-W12 | 11m | 14m | 17m | 23m | 29m | |
| CL-5050RGBWW060HY24-W12 | 12m | 14m | 17m | 23m | 29m | |
| CL-5050RGBWW084HL24V-W12 | 5m | 5m | 7m | 9m | 11m | |

*5050 LED strip working voltage: 24V

*2 year warranty

DC24V adapter/Adapter specification

| | CL-24V24W-S | CL-24V40W-S | CL-24V48W-S | CL-24V60W-S | CL-24V75W-S |
|---|--|--|--|--|---|
|  | Name:Standard switch power supply Power:24W Input voltage:100-240V Output voltage:24V Output current:1A Protection grade:: IP20 | Name:Standard switch power supply Power:40W Input voltage:100-240V Output voltage:24V Output current:1.6A Protection grade:: IP20 | Name:Standard switch power supply Power:48W Input voltage:100-240V Output voltage:24V Output current:2A Protection grade:: IP20 | Name:Standard switch power supply Power:60W Input voltage:100-240V Output voltage:24V Output current:2.5A Protection grade:: IP20 | Name:Standard switch power supply Power:75W Input voltage:100-240V Output voltage:24V Output current:3.15A Protection grade:: IP20 |
| CL-5050RGBXW060HY24-W12 | 1m | 2m | 2m | 3m | 3m |
| CL-5050RGBXW084HY24-W12 | 1m | 2m | 2m | 2m | 3m |
| CL-5050RGB+3014WW060HY24-W12 | 2m | 3m | 3m | 4m | 5m |
| CL-5050RGB+2835CW+WW036HL24V-W12 | 3m | 5m | 5m | 7m | 9m |
| CL-5050RGBWW060HY24-W12 | 3m | 5m | 6m | 7m | 9m |
| CL-5050RGBWW084HL24V-W12 | 1m | 2m | 2m | 3m | 3m |

*5050 LED strip working voltage: 24V
*1 year warranty

DC24V adapter/Adapter specification

| | CL-24V100W-S | CL-24V120W-S | CL-24V150W-S | CL-24V180W-S | CL-24V200W-S |
|----------------------------------|---|--|---|--|--|
| | Name:Standard switch power supply Power:100W Input voltage:100-240V Output voltage:24V Output current:4.25A Protection grade: IP20 | Name:Standard switch power supply Power:120W Input voltage:100-240V Output voltage:24V Output current:5A Protection grade: IP20 | Name:Standard switch power supply Power:150W Input voltage:100-240V Output voltage:24V Output current:6.25A Protection grade: IP20 | Name:Standard switch power supply Power:180W Input voltage:100-240V Output voltage:24V Output current:7.5A Protection grade: IP20 | Name:Standard switch power supply Power:200W Input voltage:100-240V Output voltage:24V Output current:8.3A Protection grade: IP20 |
| CL-5050RGBXW060HY24-W12 | 4m | 5m | 7m | 8m | 9m |
| CL-5050RGBXW084HY24-W12 | 3m | 4m | 5m | 6m | 6m |
| CL-5050RGB+3014WW060HY24-W12 | 12m | 14m | 17m | 22m | 23m |
| CL-5050RGB+2835CW+WW036HL24V-W12 | 11m | 14m | 17m | 21m | 23m |
| CL-5050RGBWW060HY24-W12 | 3m | 4m | 4m | 5m | 7m |
| CL-5050RGBWW084HL24V-W12 | 5m | 5m | 7m | 8m | 9m |

*5050 LED strip working voltage: 24V
*1 year warranty

DC24V adapter/Adapter specification

| LED strip model | Power supply Model & Spec. | CL-24V250W-S | CL-24V300W-S | CL-24V360W-S | CL-24V400W-S | CL-24V420W-S |
|----------------------------------|----------------------------|--|--|--|--|--|
| | Length of strip | Name:Standard switch power supply Power:250W Input voltage:100-240V Output voltage:24V Output current:10.4A Protection grade:: IP20 | Name:Standard switch power supply Power:300W Input voltage:100-240V Output voltage:24V Output current:12.5A Protection grade:: IP20 | Name:Standard switch power supply Power:360W Input voltage:100-240V Output voltage:24V Output current:15A Protection grade:: IP20 | Name:Standard switch power supply Power:400W Input voltage:100-240V Output voltage:24V Output current:16.6A Protection grade:: IP20 | Name:Standard switch power supply Power:420W Input voltage:100-240V Output voltage:24V Output current:17.5A Protection grade:: IP20 |
| CL-5050RGBXW060HY24-W12 | 11m | 13m | 15m | 17m | 18m | |
| CL-5050RGBXW084HY24-W12 | 8m | 9m | 11m | 10m | 13m | |
| CL-5050RGB+3014WW060HY24-W12 | 15m | 18m | 22m | 25m | 7m | |
| CL-5050RGB+2835CW+WW036HL24V-W12 | 29m | 34m | 41m | 46m | 48m | |
| CL-5050RGBWW060HY24-W12 | 3m | 4m | 4m | 5m | 26m | |
| CL-5050RGBWW084HL24V-W12 | 11m | 14m | 16m | 18m | 19m | |

*5050 LED strip working voltage: 24V