



CR40

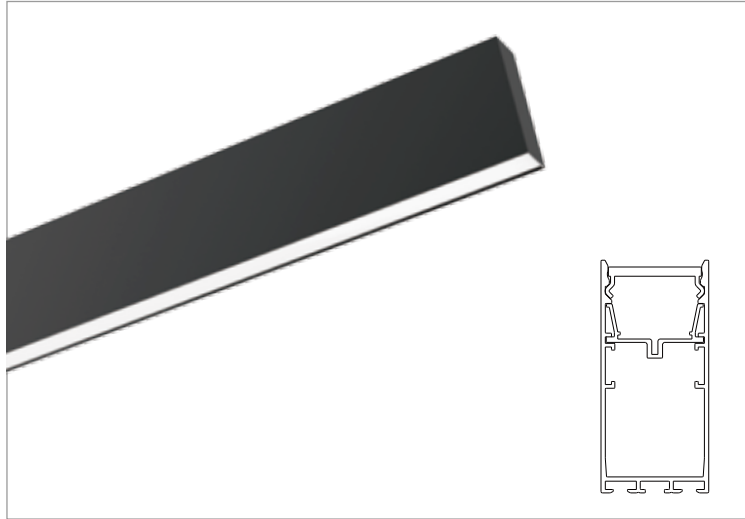

Luminous Flux : 4500LM
 Power : 50W
 CCT : 3000K, 4000K
 CRI > 80
 Beam Angle : 100°
 Input Voltage : 220-240VAC
 Total Harmonic Distortion : <20%
 Life Span : >50000Hrs(Ta=30°C@L70)
 Operating Temperature : -30~+45°C
 Storage Temperature : -40~+70°C
 Junction Temperature(Tj) : <70°C(Ta=30°C)


CR40 Product Range

Model	CR40-10-F	CR40-12-F	CR40-15-F
Luminous Flux	2700LM	3600LM	4500LM
Power	30W	40W	50W
Luminous Efficacy	90lm/W	90lm/W	90lm/W
CCT	3000K, 4000K		
CRI	> 80		
Beam Angle	100°		
Input Voltage	AC 220-240V (50/60Hz)		
IP Rating	IP40		
LED Driver	OSRAM X-power / Lifud		
Certifications	CE RoHS		



Control

DALI

Photometric Diagrams



CR40

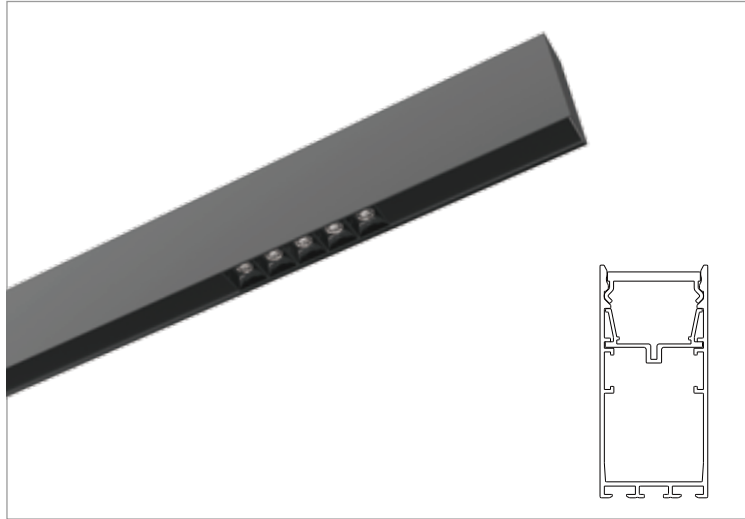

Luminous Flux : 2600LM
 Power : 40W
 CCT : 3000K, 4000K
 CRI > Ra80
 Beam Angle : 10° 24° 36° 48°
 Input Voltage : 220-240VAC
 Total Harmonic Distortion : <20%
 Life Span : >50000Hrs(Ta=30°C@L70)
 Operating Temperature : -30~+45°C
 Storage Temperature : -40~+70°C
 Junction Temperature(Tj) : <70°C(Ta=30°C)


CR40 Product Range

Model	CR40-10-2C	CR40-12-3C	CR40-15-4C
Luminous Flux	1300LM	1950LM	2600LM
Power	20W	30W	40W
Luminous Efficacy	65lm/W	65lm/W	65lm/W
CCT	3000K, 4000K		
CRI	> 80		
Beam Angle	10° 24° 36° 48°		
Input Voltage	AC 220-240V (50/60Hz)		
IP Rating	IP40		
LED Driver	OSRAM X-power / Lifud		
Certifications	CE RoHS		



Control

DALI

Photometric Diagrams

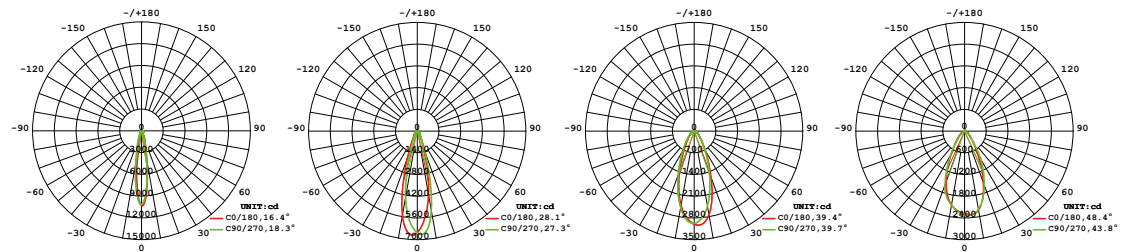

CR40

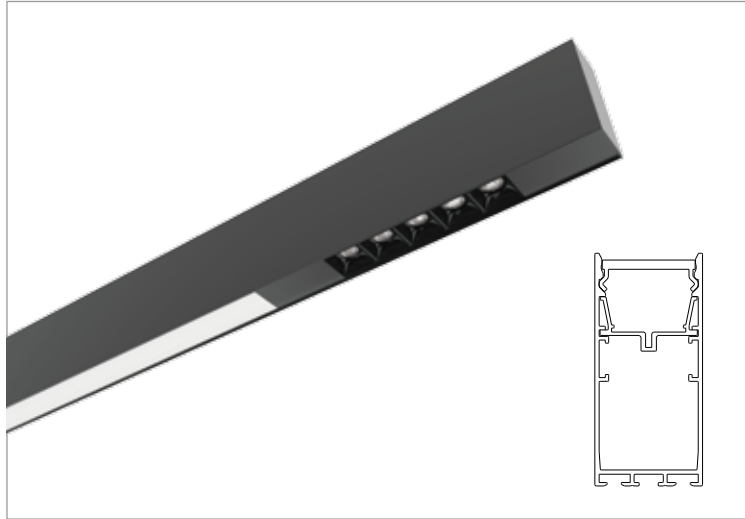

Luminous Flux: 2600LM
 Power : 40W
 CCT : 3000K, 4000K
 CRI > 80
 Beam Angle : 10° 24° 36° 48° +100°
 Input Voltage : 220-240VAC
 Total Harmonic Distortion : <20%
 Life Span : >50000Hrs(Ta=30°C@L70)
 Operating Temperature : -30~+45°C
 Storage Temperature : -40~+70°C
 Junction Temperature(Tj) : <70°C(Ta=30°C)


CR40 Product Range

Model	CR40-10-1F	CR40-12-1F	CR40-15-1F
Luminous Flux	650/1300LM	650/1950LM	650/2600LM
Power	10W/20W	10/30W	10/40W
Luminous Efficacy	65lm/W	65lm/W	65lm/W
CCT	3000K, 4000K		
CRI	> 80		
Beam Angle	10° 24° 36° 48° +100°		
Input Voltage	AC 220-240V (50/60Hz)		
IP Rating	IP40		
LED Driver	OSRAM X-power / Lifud		
Certifications	CE RoHS		



Control

DALI

Photometric Diagrams

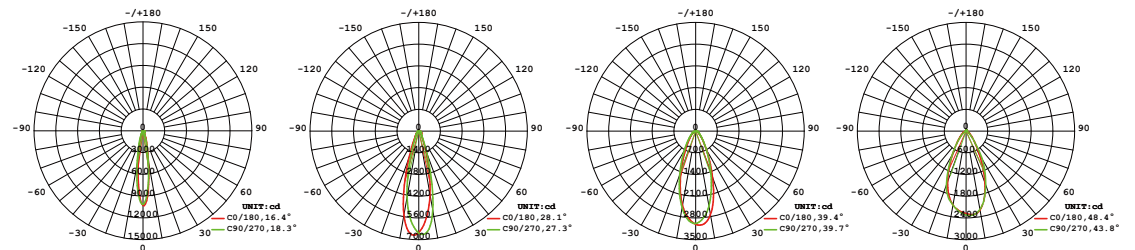

CR40

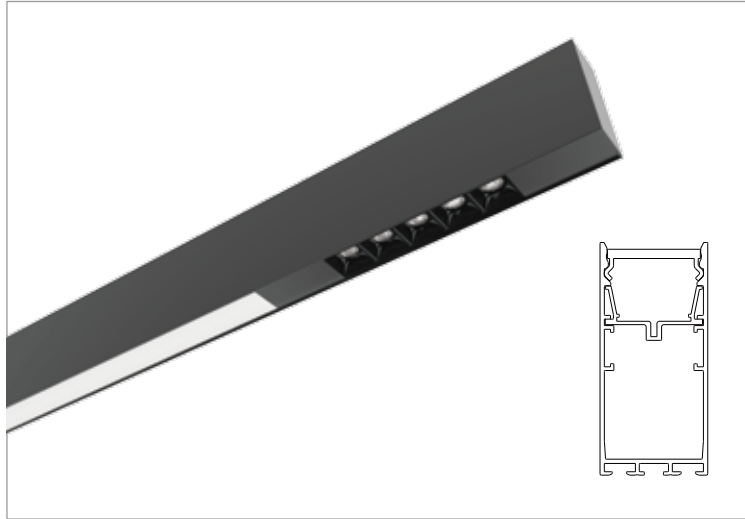

Luminous Flux : 1300/1950LM
 Power : 20/30W
 CCT : 3000K, 4000K
 CRI > 80
 Beam Angle : 10° 24° 36° 48° +100°
 Input Voltage : 220-240VAC
 Total Harmonic Distortion : <20%
 Life Span : >50000Hrs(Ta=30°C@L70)
 Operating Temperature : -30~+45°C
 Storage Temperature : -40~+70°C
 Junction Temperature(Tj) : <70°C(Ta=30°C)

CR40 Product Range

Model	CR40-10-2F	CR40-12-2F	CR40-15-2F
Luminous Flux	1300/650LM	1300LM	1300/1950LM
Power	20W/10W	20/20W	20/30W
Luminous Efficacy	65lm/W	65lm/W	65lm/W
CCT	3000K, 4000K		
CRI	> 80		
Beam Angle	10° 24° 36° 48° +100°		
Input Voltage	AC 220-240V (50/60Hz)		
IP Rating	IP40		
LED Driver	OSRAM X-power / Lufid		
Certifications	CE RoHS		

Control

DALI

Photometric Diagrams

